

VALVOLE 1" 1/2



ATTACCO RAPIDO AE1440R Con Gruppo Pilota

Le classiche valvole a 90° con attacco per tubo liscio



CERTIFICAZIONI PRODOTTO

STANDARD



OPZIONALI



SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Uscita		Hole 1" 1/2
Ingresso		Hole 1" 1/2
Pressione di Esercizio		1,5-8 bar
Range Temperatura Standard		-40 °C ; +100 °C
Range Alta Temperatura		-20 °C ; +200 °C
Kv		48 m ³ /h
Peso		2.24 kg
Grado di protezione (standard)		IP65


SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Classi purezza aria consigliati (ISO 8573-1)	Per Solidi	2
	Per Acqua con $T > +3^{\circ}\text{C}$	4
	Per Acqua con $-20^{\circ}\text{C} < T < +3^{\circ}\text{C}$	3
	Per Acqua con $-40^{\circ}\text{C} < T < -20^{\circ}\text{C}$	2
	Per Olio	1


LISTA COMPONENTI

No.	Descrizione	Materiale
A	Clip	CS Galvanized
B	Coil	PA
C	Connector	PA + NBR
D	Pilot	SS + Brass
1	Screw M6	SS
2	Washer	SS
3	Cover 3/4"	Die Cast Alu
4	Diaphragm 3/4"	TPE
5	Screw M8	SS
6	Washer	SS
7	Cover 1" 1/2	Die Cast Alu
8a	STD Diaphragm 1"1/2	TPE
8b	HT Diaphragm 1" 1/2 Kit	NBR+PTFE
9	Body 1" 1/2 Coupling	Die Cast Alu
10	Tapper Gasket	NBR
11	1" 1/2 Washer	CS Galvanized
12	Nut	Die Cast Alu

Immagine

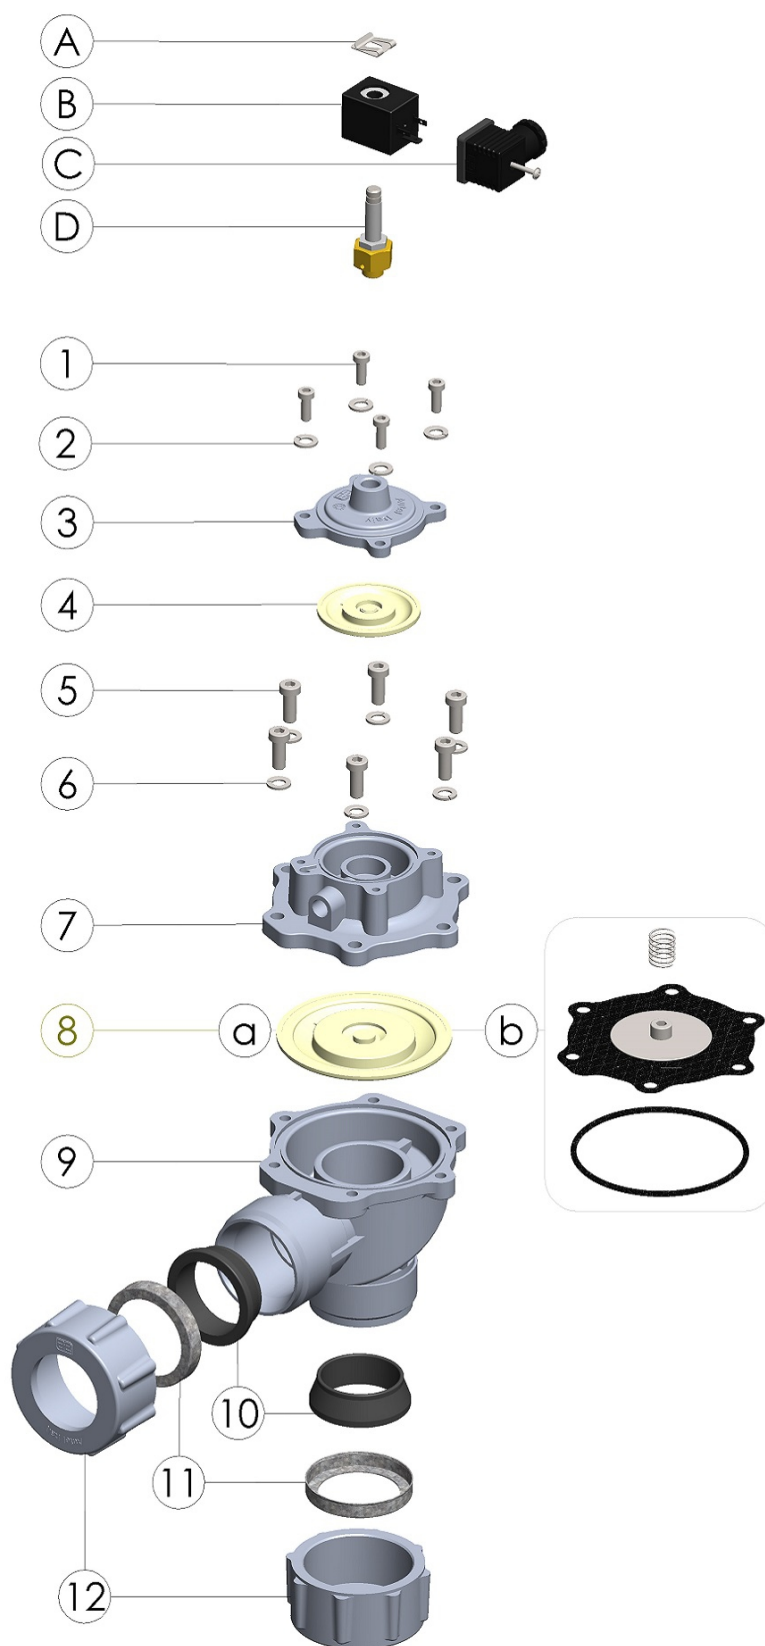

LAYOUT DIMENSIONALI

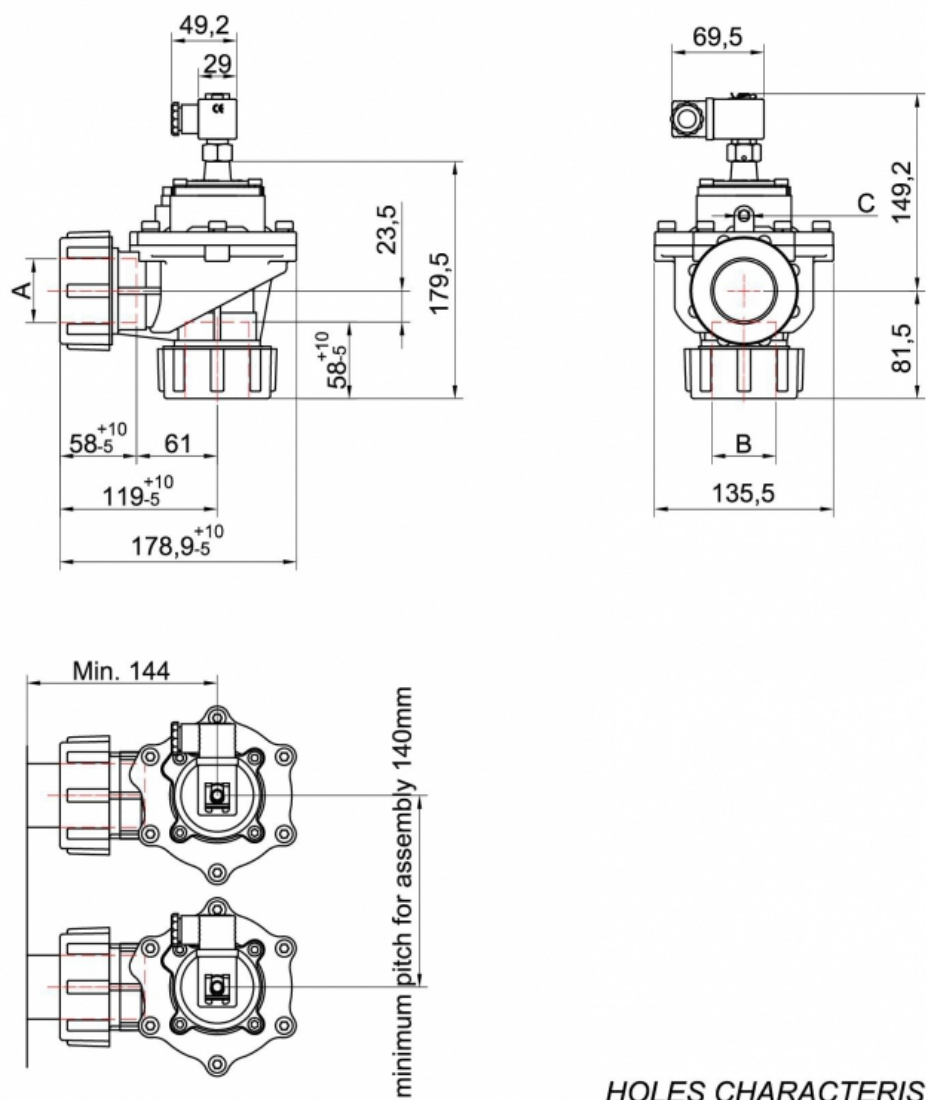

HOLES CHARACTERISTICS

HOLES	STANDARD	OPTIONAL
A	1 1/2" G = Ø48,3 mm	-
B	1 1/2" G = Ø48,3 mm	-
C	1/4" G (ISO 228/1)	-

TABELLE CONSUMI

