

VALVOLE 2" ½



INTEGRATA PER SERBATOIO Ø 12" AE1460I12 Con Gruppo Pilota

Valvole ad alte prestazioni integrate nel serbatoio



CERTIFICAZIONI PRODOTTO

STANDARD



OPZIONALI




SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Uscita		Pipe 2"1/2
Pressione di Esercizio		1,5-8 bar
Range Temperatura Standard		-40 °C ; +100 °C
Range Alta Temperatura		-20 °C ; +200 °C
Peso		11.1 kg
Grado di protezione (standard)		IP65
Classi purezza aria consigliati (ISO 8573-1)	Per Solidi	2
	Per Acqua con T > +3°C	4
	Per Acqua con -20°C < T < +3°C	3
	Per Acqua con -40°C < T < -20°C	2
	Per Olio	1

LISTA COMPONENTI

No.	Descrizione	Materiale
A	Clip	CS Galvanized
B	Coil	PA
C	Connector	PA + NBR
D	Pilot	SS + Brass
1	Screw M6	SS
2	Washer	SS
3	Cover 3/4"	Die Cast Alu
5	Screw M8	SS
6	Washer	SS
7	Cover 2" 1/2	Die Cast Alu
8a	STD Diaphragm 2"1/2	TPE
8b	HT Diaphragm 2" 1/2Kit	NBR+PTFE
9	Body 2" 1/2 Integrated	Die Cast Alu
10	Body Pipe O'Ring	NBR
11	Body Tank O'Ring	NBR
12	Clamp Tank O'Ring	NBR
13	Clamp 2"1/2	Die Cast Alu
14	Pipe Clamp O'Ring	NBR
15	Washer 2" 1/2	Pa + Ela
16	Blow Pipe 2"1/2	CS or SS

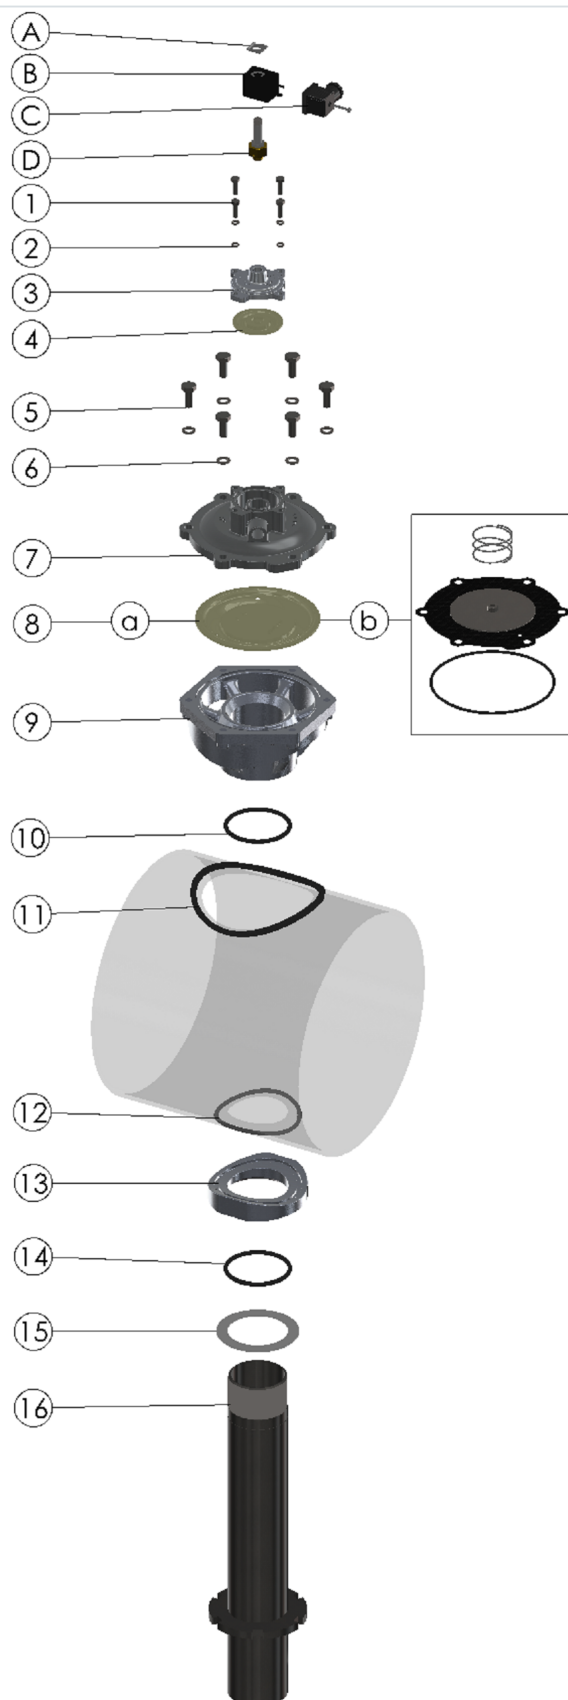Immagine


LAYOUT DIMENSIONALI

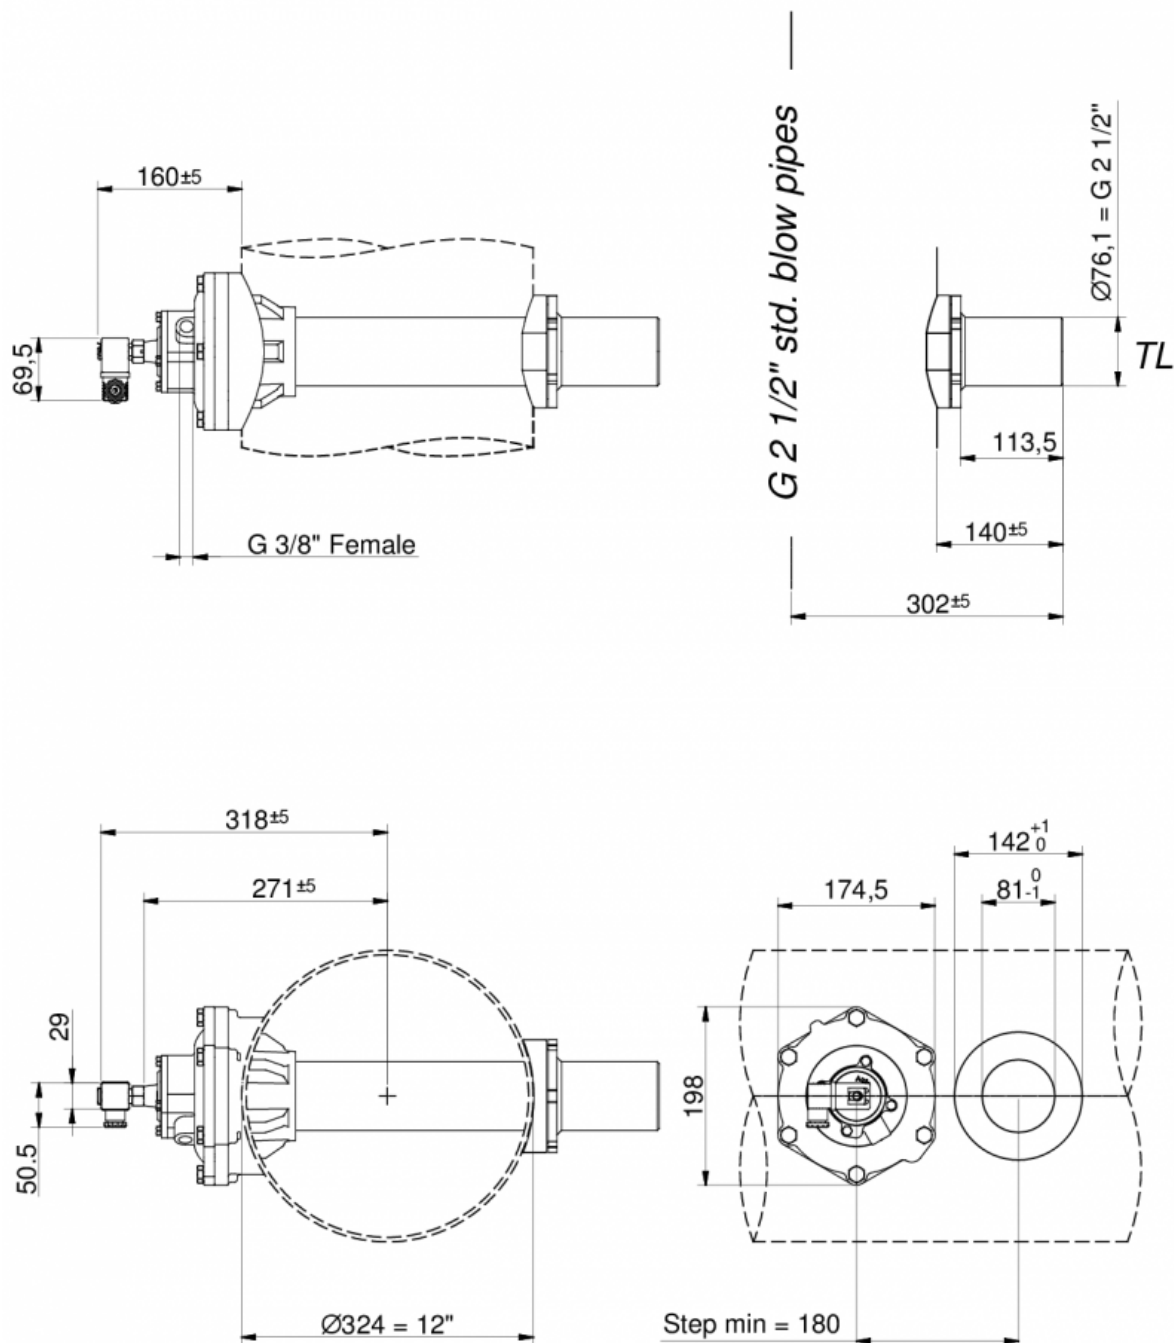


TABELLE CONSUMI

