

VALVOLE 1" ½



ATTACCO A VITE AE2440B Con Valvola Pneumatica

Le classiche valvole a 90° con attacco filettato femmina



CERTIFICAZIONI PRODOTTO

STANDARD



OPZIONALI




SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Uscita		1" 1/2 Gas
Ingresso		1" 1/2 Gas
Pressione di Esercizio		1,5-8 bar
Range Temperatura Standard		-40 °C ; +100 °C
Range Alta Temperatura		-20 °C ; +200 °
Kv		48 m ³ /h
Peso		1.4 kg
Grado di protezione (standard)		IP65


SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Classi purezza aria consigliati (ISO 8573-1)	Per Solidi	2
	Per Acqua con $T > +3^{\circ}\text{C}$	4
	Per Acqua con $-20^{\circ}\text{C} < T < +3^{\circ}\text{C}$	3
	Per Acqua con $-40^{\circ}\text{C} < T < -20^{\circ}\text{C}$	2
	Per Olio	1

LISTA COMPONENTI

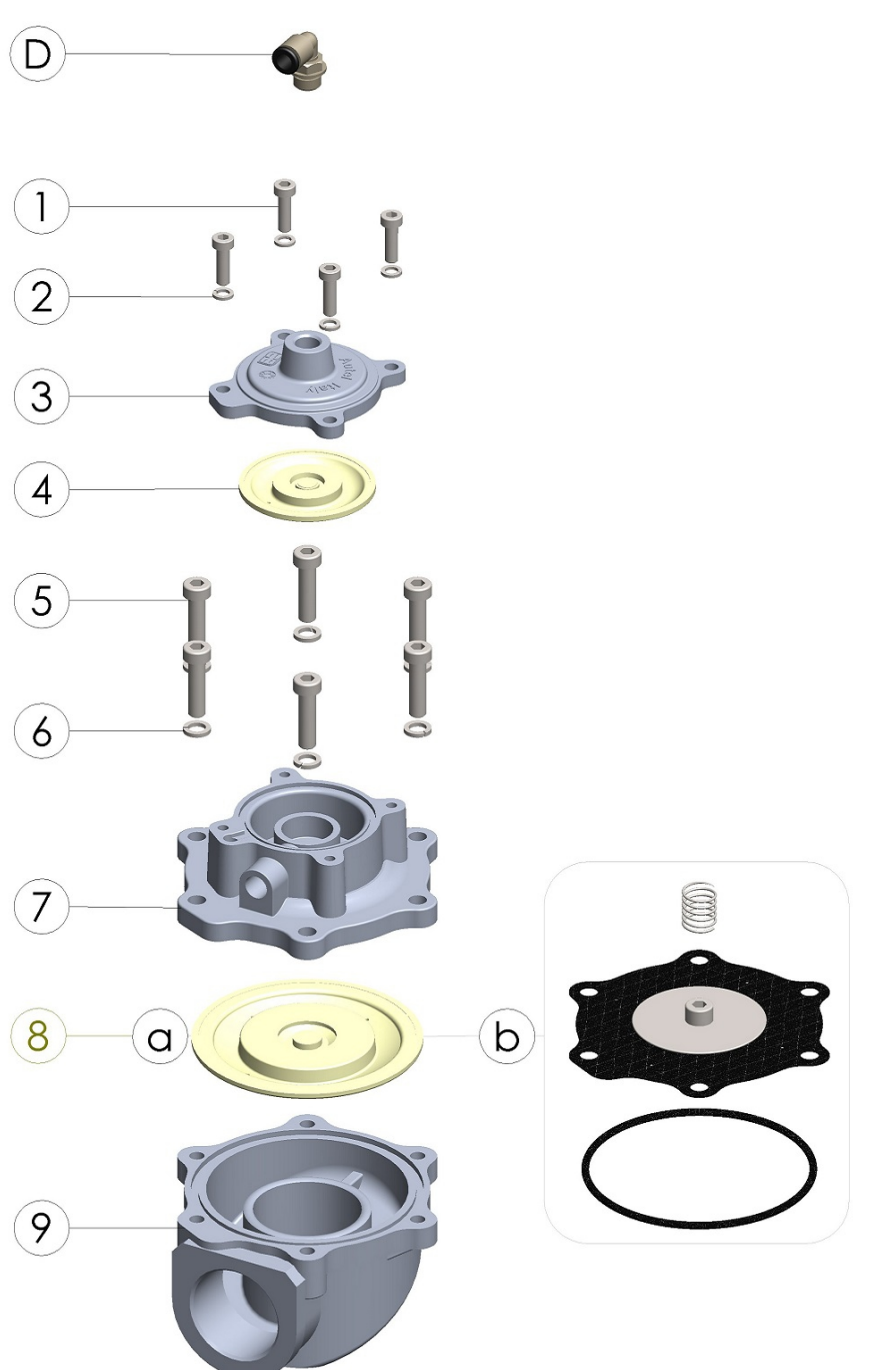No.	Descrizione	Materiale	Immagine
D	Optional Fitting	Nickel Brass	
1	Screw M6	SS	
2	Washer	SS	
3	Cover 3/4"	Die Cast Alu	
4	Diaphragm 3/4"	TPE	
5	Screw M8	SS	
6	Washer	SS	
7	Cover 1" 1/2	Die Cast Alu	
8a	STD Diaphragm 1" 1/2	TPE	
8b	HT Diaphragm 1" 1/2 Kit	NBR+PTFE	
9	Body 1" 1/2 Screw	Die Cast Alu	

LAYOUT DIMENSIONALI

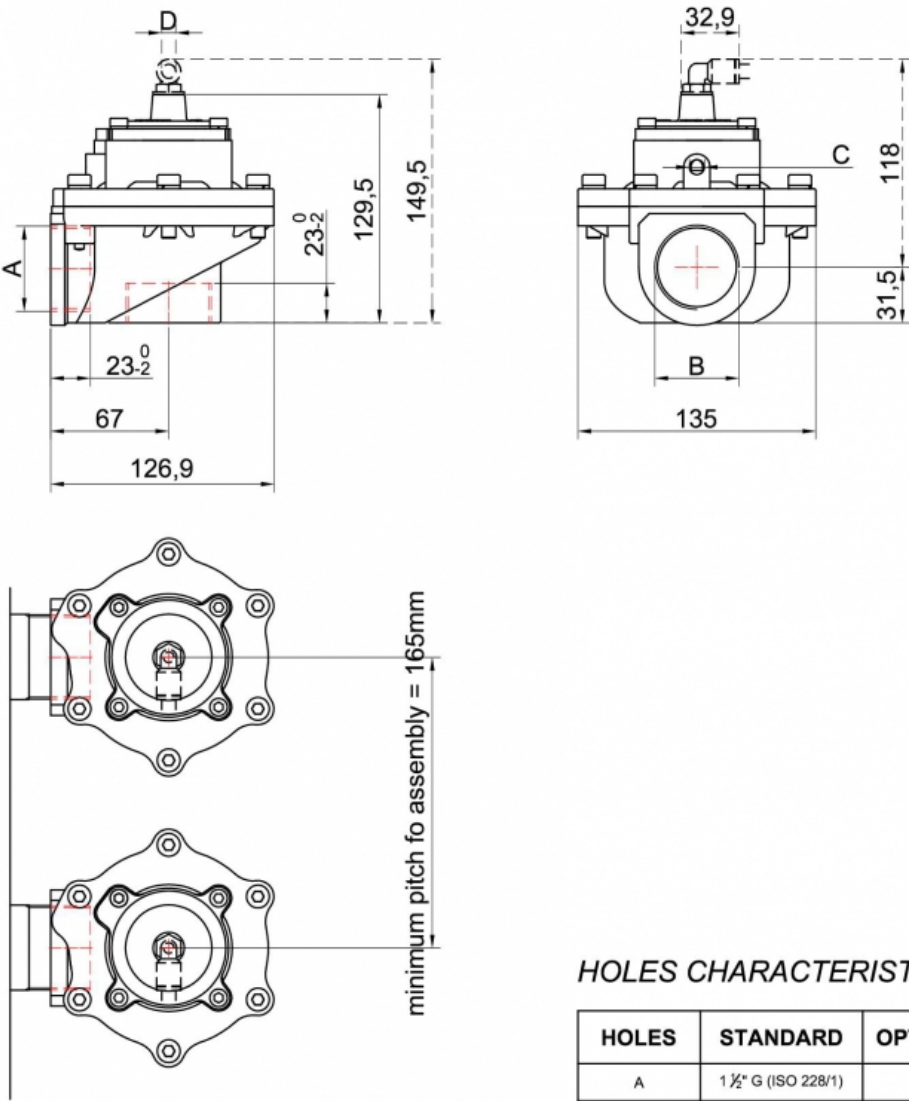

HOLES CHARACTERISTICS

HOLES	STANDARD	OPTIONAL
A	1 1/2" G (ISO 228/1)	-
B	1 1/2" G (ISO 228/1)	-
C	1/4" G (ISO 228/1)	-
D		1/4" G (ISO 228/1) Rilsan 8mm - 5/16"

TABELLE CONSUMI

