

1" ½ VALVES



INTEGRATED SINGLE STAGE FOR Ø 8 " TANK AE1840I08 With Pilot Group

Hight performance valves integrated in the tank



PRODUCT CERTIFICATIONS

STANDARD



OPZIONALI



VALVE TECHNICAL FEATURES

Features		Values
Out		Pipe 1"1/2
Working Pressure		1,5-8 bar
Standard Temperature Range		-40 °C ; +100 °C
High Range Temperature		-20 °C ; +200 °
Kv		60 m ³ /h
Weight		2,1-3.0 kg
Protection Level		IP65


VALVE TECHNICAL FEATURES

Features		Values
Air quality classes (ISO 8573-1)	For Solid	2
	For Water with $T > +3^{\circ}\text{C}$	4
	For Water with $-20^{\circ}\text{C} < T < +3^{\circ}\text{C}$	3
	For Water with $-40^{\circ}\text{C} < T < -20^{\circ}\text{C}$	2
	For Oil	1


PARTS LIST

No.	Description	Material
A	Clip	CS Galvanized
B	Coil	PA
C	Connector	PA + NBR
D	Pilot	SS + Brass
1	Screw M8	SS
2	Washer	SS
3	Cover 1" 1/2	Die Cast Alu
4a	STD Diaphragm 1" 1/2	TPE
4b	HT Diaphragm 1" 1/2 Kit	NBR+PTFE
5	Body 1" 1/2 Integrated	Die Cast Alu
6	Body Pipe O'Ring	NBR
7	Body Tank O' Ring	NBR
8	Clamp Tank O'Ring	NBR
9	Clamp 1"1/2	Die Cast Alu
10	Pipe Clamp O'Ring	NBR
11	Washer 1" 1/2	Pa 6,6+ Ela
12	Blow Pipe 1" 1/2	CS or SS

Immagine

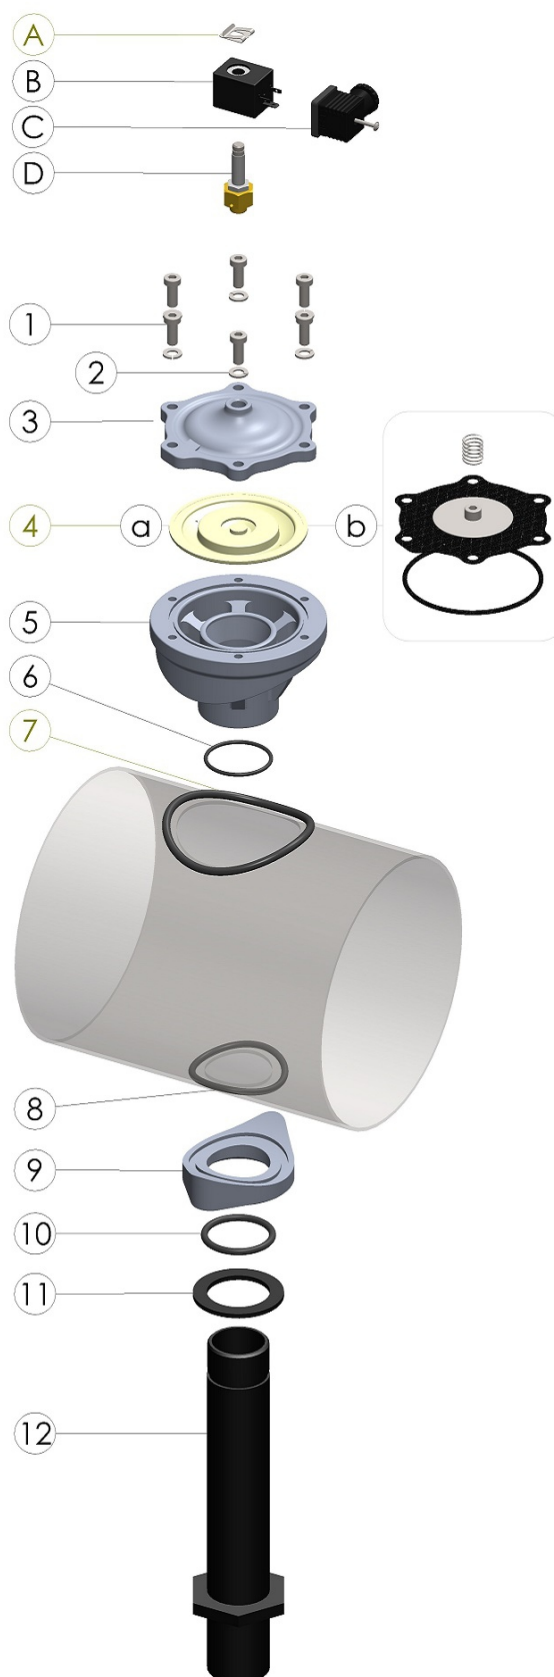

DIMENSIONAL LAYOUT

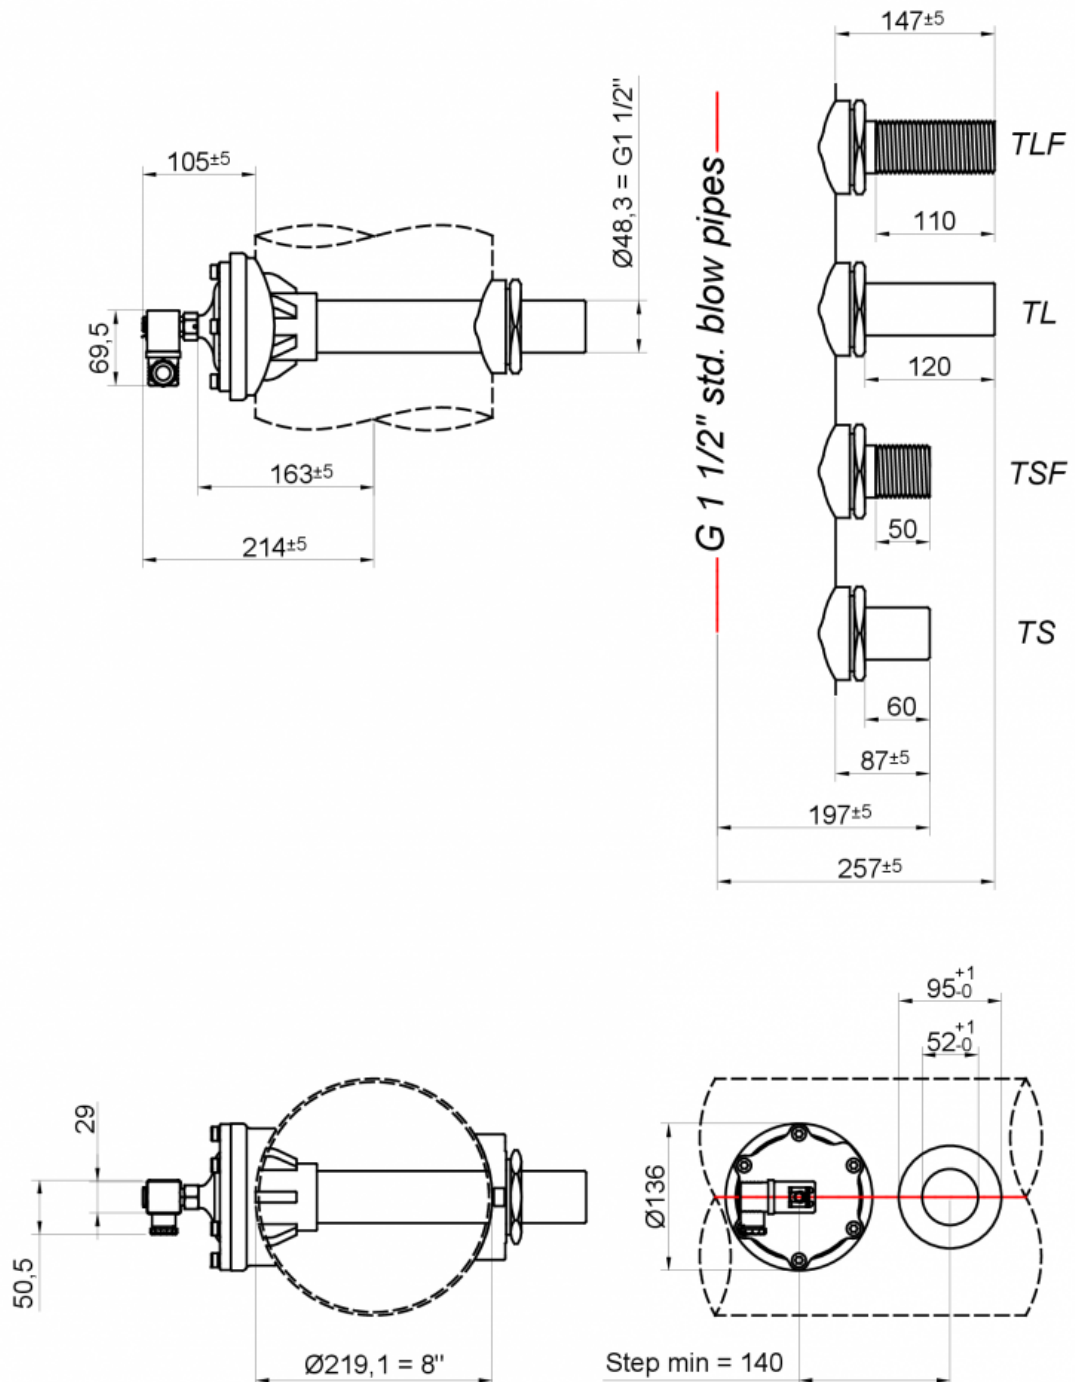

CONSUMPTION GRAPHS

