

VALVOLE 1" ½



INTEGRATA SINGOLO STADIO PER SERBATOIO Ø 8"

AE1840I08 Con Gruppo Pilota

Valvole ad alte prestazioni integrate nel serbatoio



CERTIFICAZIONI PRODOTTO

STANDARD



OPZIONALI



SPECIFICHE TECNICHE VALVOLA


Caratteristiche		Valori
Uscita		Pipe 1"1/2
Pressione di Esercizio		1,5-8 bar
Range Temperatura Standard		-40 °C ; +100 °C
Range Alta Temperatura		-20 °C ; +200 °
Kv		60 m³/h
Peso		2,1-3.0 kg
Grado di protezione (standard)		IP65

SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Classi purezza aria consigliati (ISO 8573-1)	Per Solidi	2
	Per Acqua con $T > +3^{\circ}\text{C}$	4
	Per Acqua con $-20^{\circ}\text{C} < T < +3^{\circ}\text{C}$	3
	Per Acqua con $-40^{\circ}\text{C} < T < -20^{\circ}\text{C}$	2
	Per Olio	1

LISTA COMPONENTI

No.	Descrizione	Materiale
A	Clip	CS Galvanized
B	Coil	PA
C	Connector	PA + NBR
D	Pilot	SS + Brass
1	Screw M8	SS
2	Washer	SS
3	Cover 1" 1/2	Die Cast Alu
4a	STD Diaphragm 1" 1/2	TPE
4b	HT Diaphragm 1" 1/2 Kit	NBR+PTFE
5	Body 1" 1/2 Integrated	Die Cast Alu
6	Body Pipe O'Ring	NBR
7	Body Tank O' Ring	NBR
8	Clamp Tank O'Ring	NBR
9	Clamp 1"1/2	Die Cast Alu
10	Pipe Clamp O'Ring	NBR
11	Washer 1" 1/2	Pa 6,6+ Ela
12	Blow Pipe 1" 1/2	CS or SS

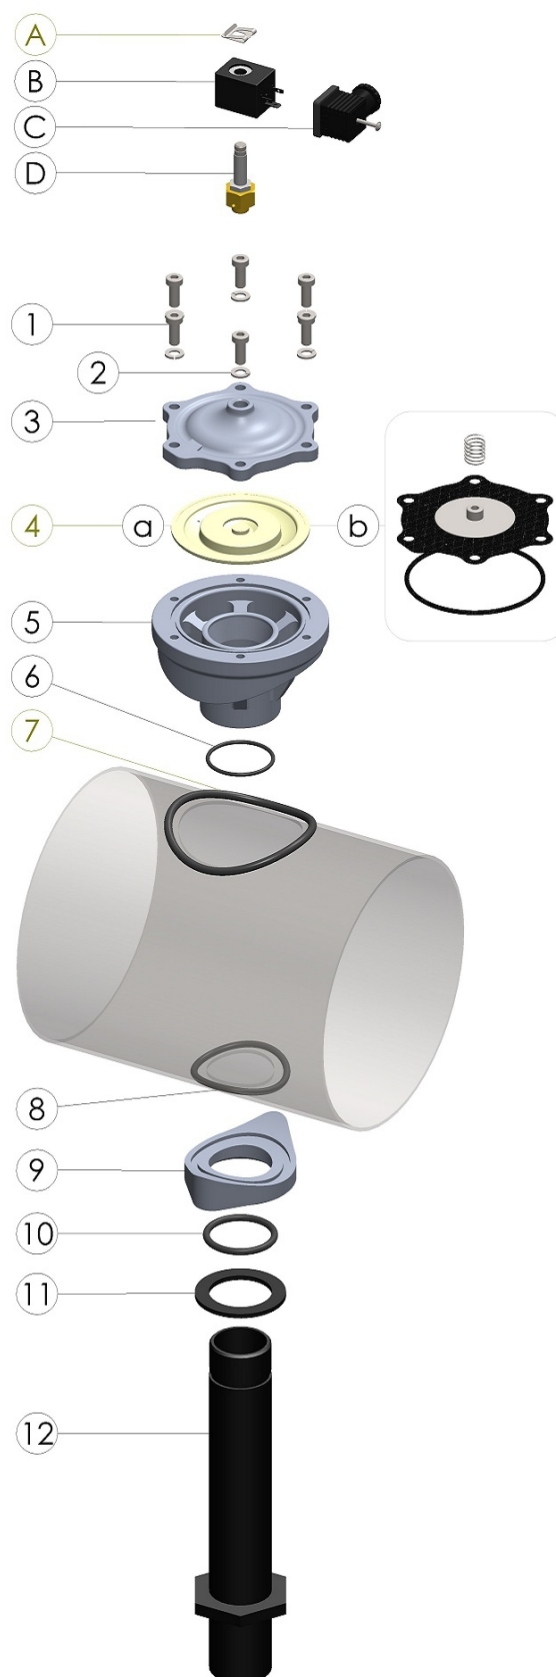Immagine


LAYOUT DIMENSIONALI

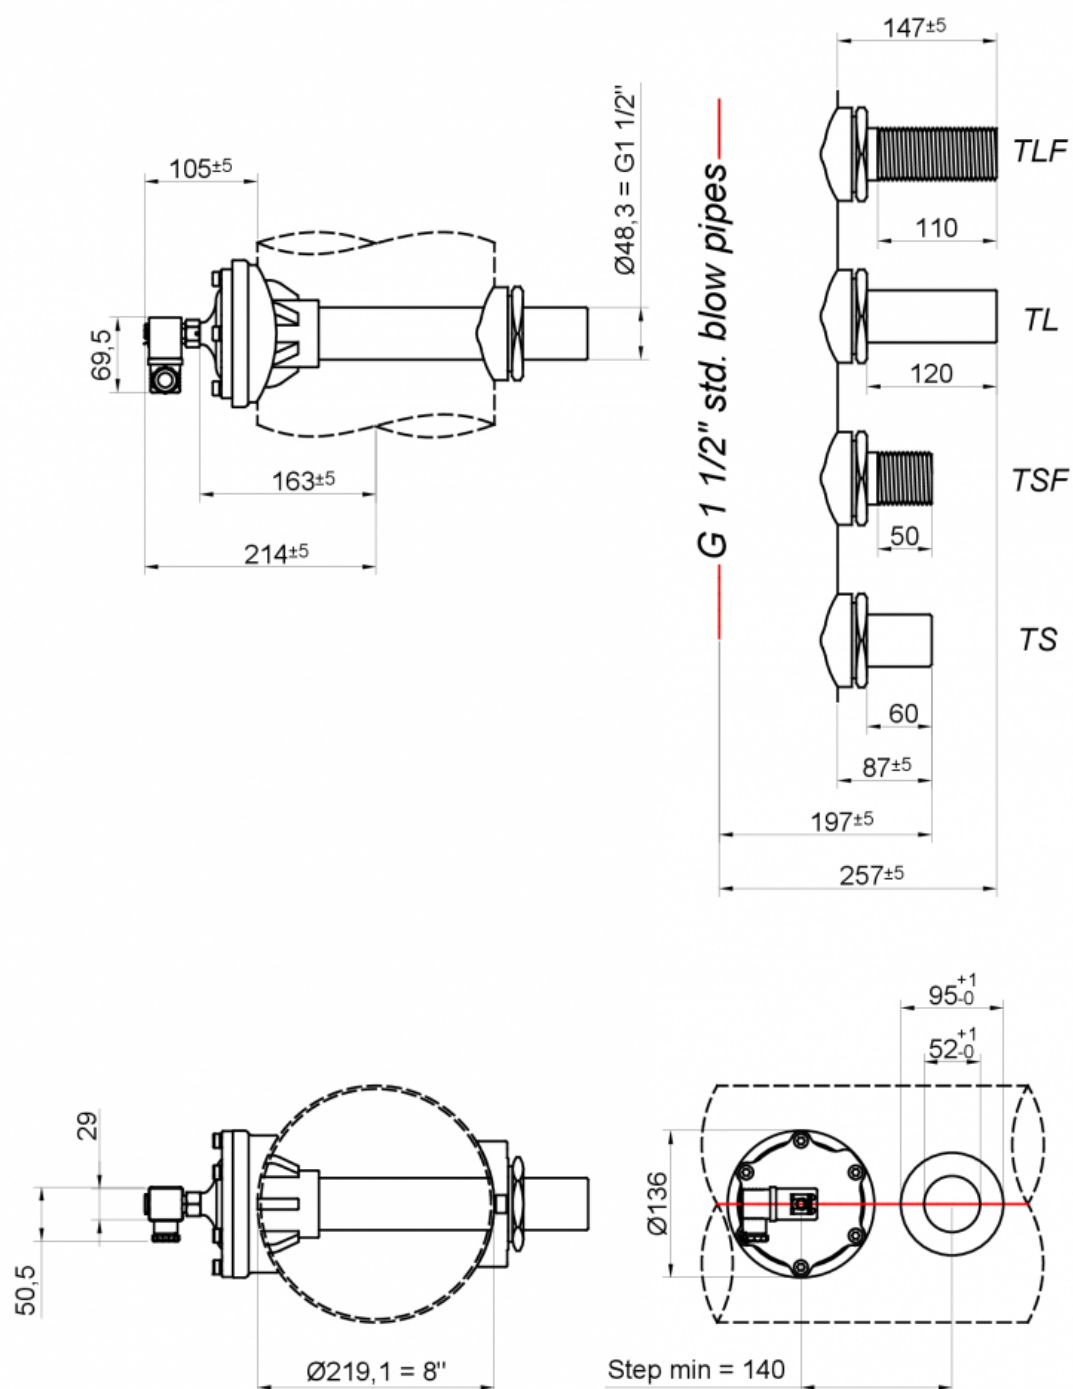


TABELLE CONSUMI

