

1" ½ VALVES



*INTEGRATED SINGLE
STAGE FOR Ø 8 " TANK
AE2840I08 With pneumatic valve
Hight performance valves integrated in the tank*



PRODUCT CERTIFICATIONS

STANDARD



OPZIONALI



VALVE TECHNICAL FEATURES

Features		Values
Out		Pipe 1"1/2
Working Pressure		1,5-8 bar
Standard Temperature Range		-40 °C ; +100 °C
High Range Temperature		-20 °C ; +200 °
Kv		60 m³/h
Weight		1,9-2,8 kg
Protection Level		IP65


VALVE TECHNICAL FEATURES

Features		Values
Air quality classes (ISO 8573-1)	For Solid	2
	For Water with T > +3°C	4
	For Water with -20°C < T < +3°C	3
	For Water with -40°C < T < -20°C	2
	For Oil	1


PARTS LIST

No.	Description	Material
1	Screw M8	SS
2	Washer	SS
3	Cover 1" 1/2	Die Cast Alu
4a	STD Diaphragm 1" 1/2	TPE
4b	HT Diaphragm 1" 1/2 Kit	NBR+PTFE
5	Body 1" 1/2 Integrated	Die Cast Alu
6	Body Pipe O'Ring	NBR
7	Body Tank O' Ring	NBR
8	Clamp Tank O'Ring	NBR
9	Clamp 1"1/2	Die Cast Alu
10	Pipe Clamp O'Ring	NBR
11	Washer 1" 1/2	Pa 6,6+ Ela
12	Blow Pipe 1" 1/2	CS or SS
E	Optional Fitting	Nickeled Brass

Immagine

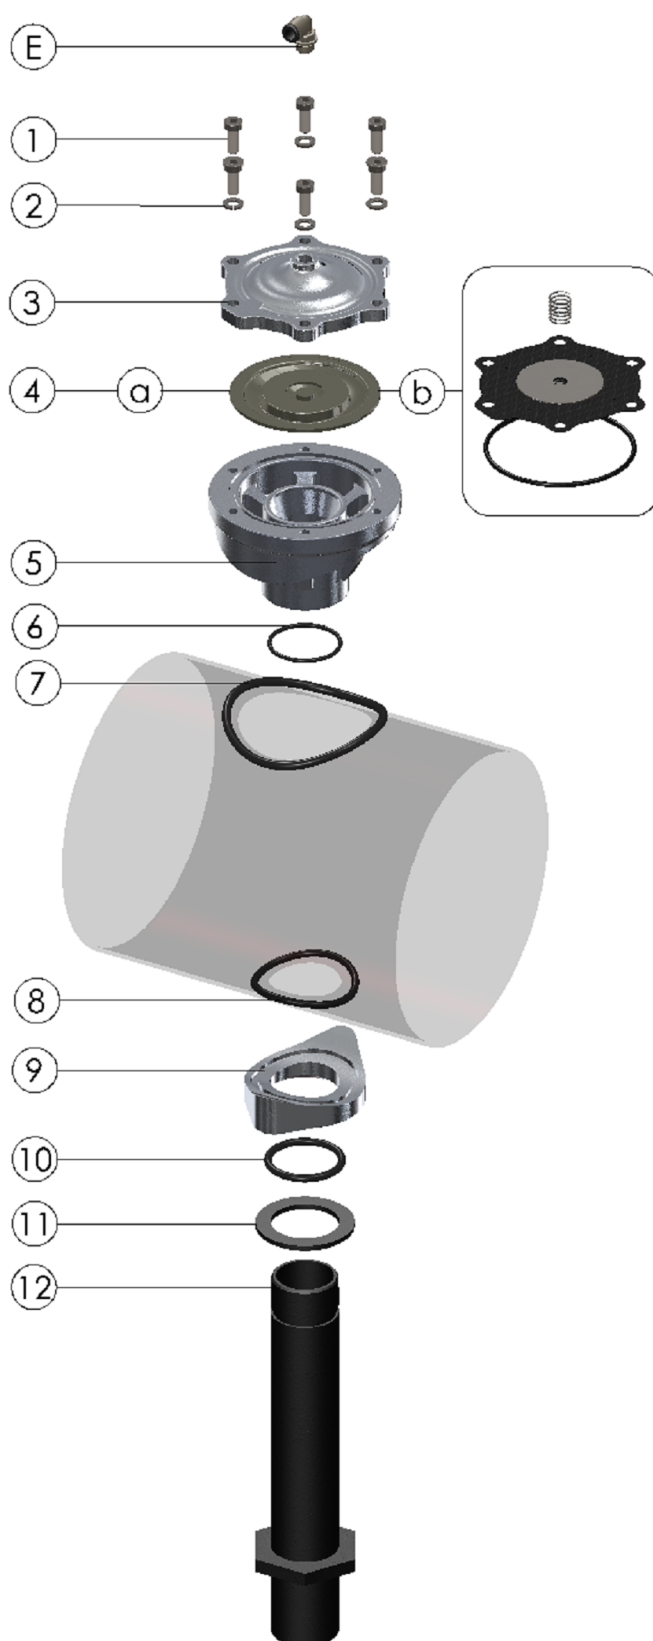

DIMENSIONAL LAYOUT

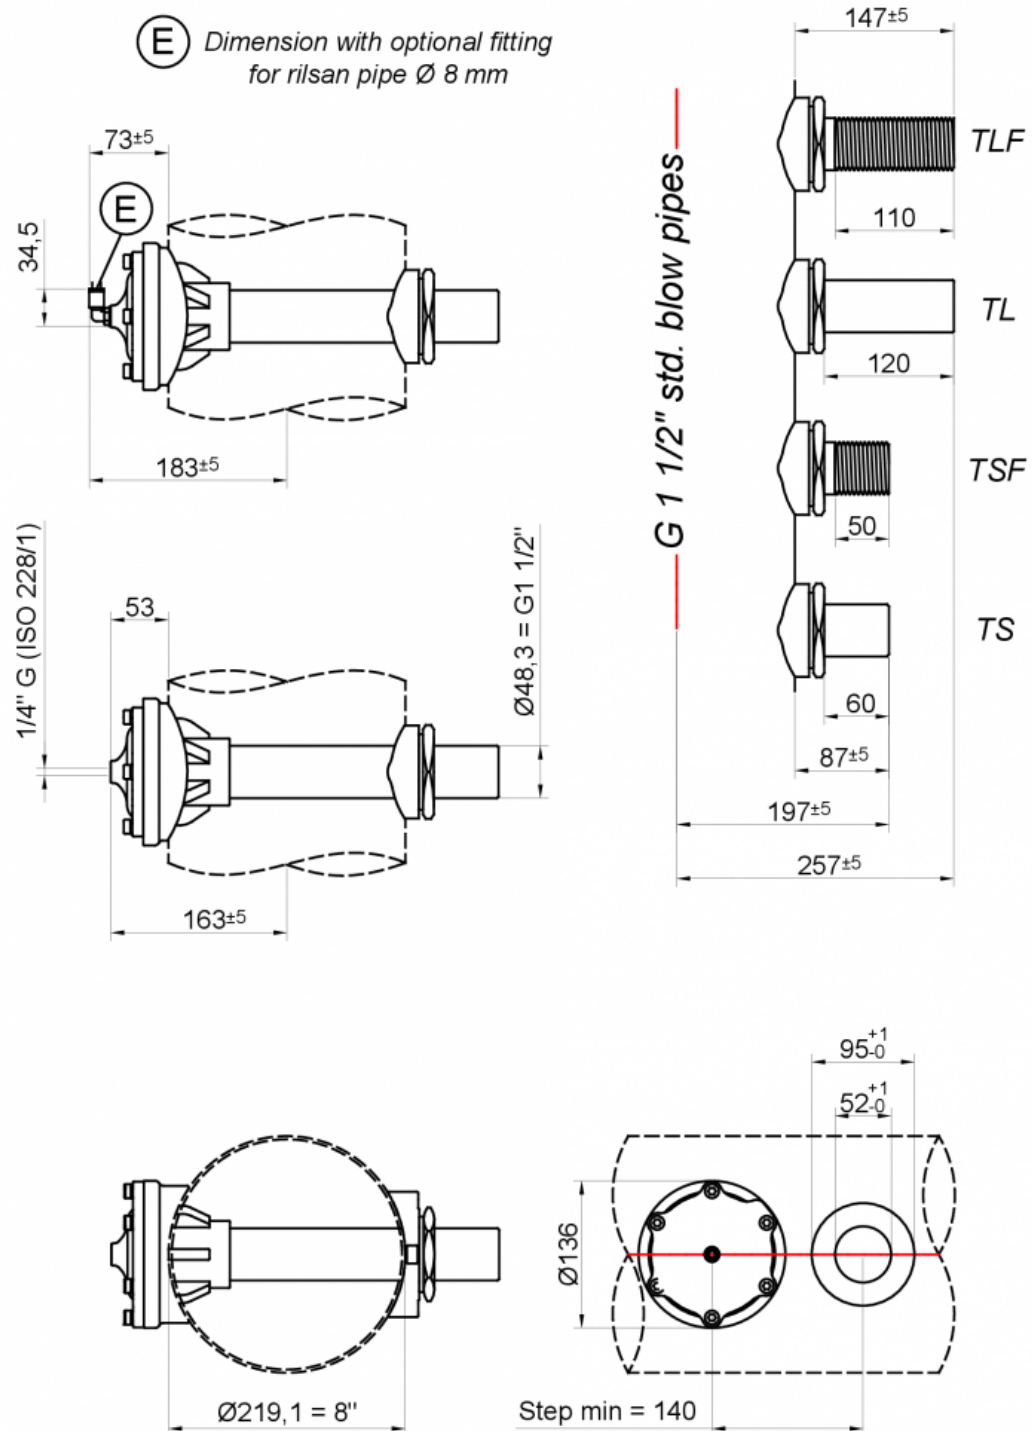

CONSUMPTION GRAPHS

