

2" ½ VALVES



INTEGRATED FOR Ø 12" TANK  
AE2460I12 With Pneumatic Valve

High performance valve integrated in the tank



PRODUCT CERTIFICATIONS

STANDARD



OPZIONALI




VALVE TECHNICAL FEATURES

| Features                          |                                  | Values           |
|-----------------------------------|----------------------------------|------------------|
| Out                               |                                  | Pipe 2"1/2       |
| Working Pressure                  |                                  | 1,5-8 bar        |
| Standard Temperature Range        |                                  | -40 °C ; +100 °C |
| High Range Temperature            |                                  | -20 °C ; +200 °C |
| Weight                            |                                  | 11 kg            |
| Protection Level                  |                                  | IP65             |
| Air quality classes ( ISO 8573-1) | For Solid                        | 2                |
|                                   | For Water with T > +3°C          | 4                |
|                                   | For Water with -20°C < T < +3°C  | 3                |
|                                   | For Water with -40°C < T < -20°C | 2                |
|                                   | For Oil                          | 1                |

## PARTS LIST





| No. | Description            | Material     |
|-----|------------------------|--------------|
| 1   | Screw M6               | SS           |
| 2   | Washer                 | SS           |
| 3   | Cover 3/4"             | Die Cast Alu |
| 5   | Screw M8               | SS           |
| 6   | Washer                 | SS           |
| 7   | Cover 2" 1/2           | Die Cast Alu |
| 8a  | STD Diaphragm 2"1/2    | TPE          |
| 8b  | HT Diaphragm 2" 1/2Kit | NBR+PTFE     |
| 9   | Body 2" 1/2 Integrated | Die Cast Alu |
| 10  | Body Pipe O'Ring       | NBR          |
| 11  | Body Tank O'Ring       | NBR          |
| 12  | Clamp Tank O'Ring      | NBR          |
| 13  | Clamp 2"1/2            | Die Cast Alu |
| 14  | Pipe Clamp O'Ring      | NBR          |
| 15  | Washer 2" 1/2          | Pa + Ela     |
| 16  | Blow Pipe 2"1/2        | CS or SS     |
| E   | Optional Fitting       | Nickel Brass |

Immagine

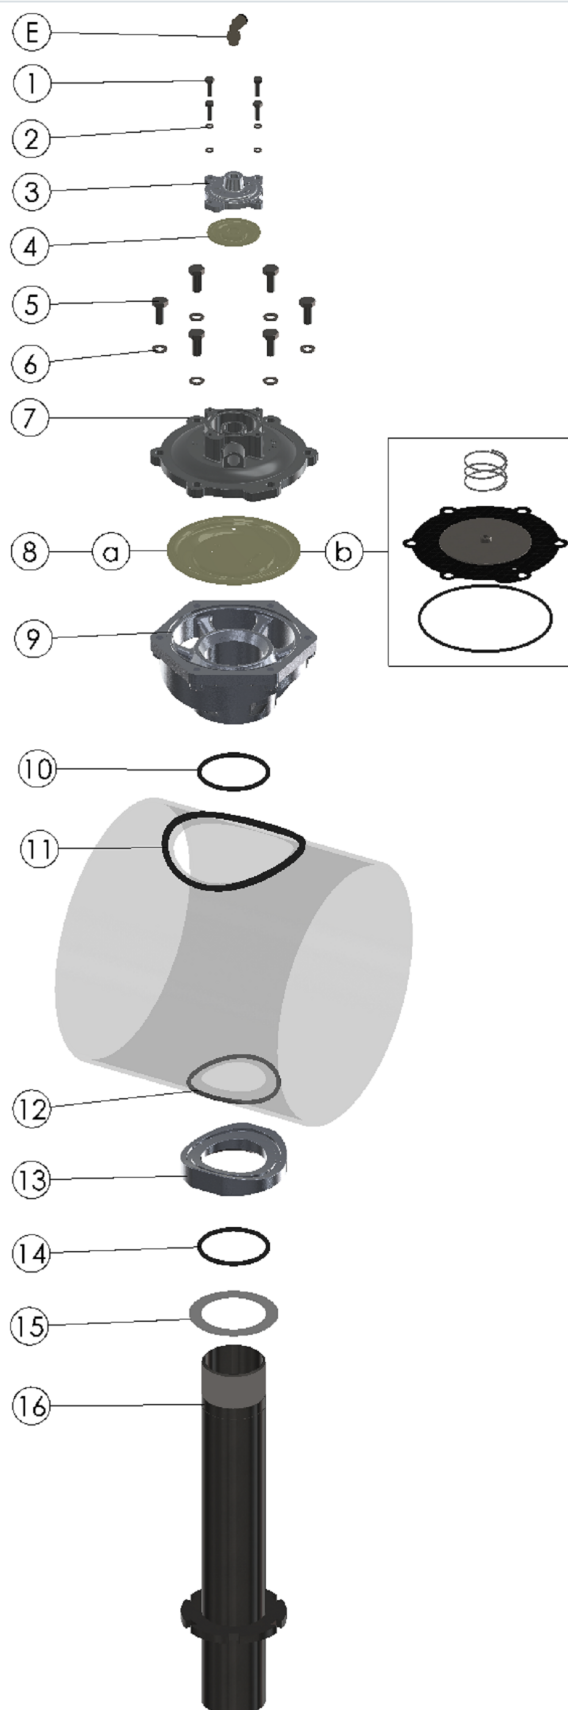

## DIMENSIONAL LAYOUT

**(E)** Dimension with optional fitting  
for rilsan pipe  $\varnothing 8$  mm

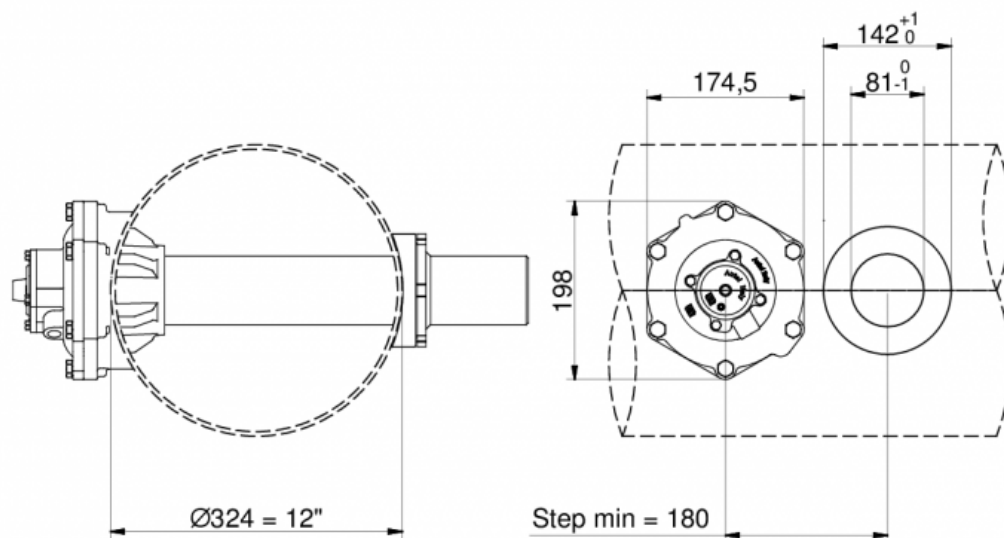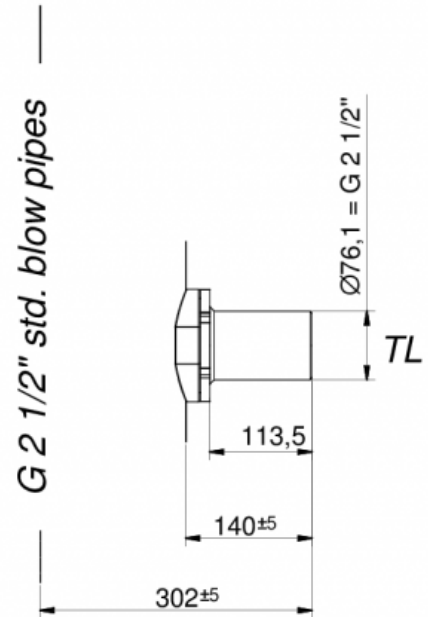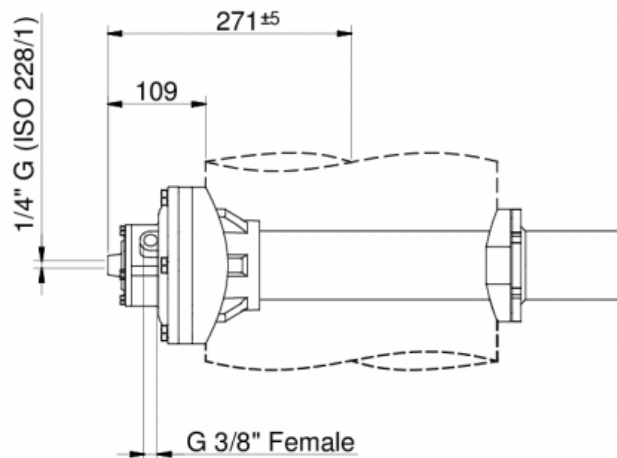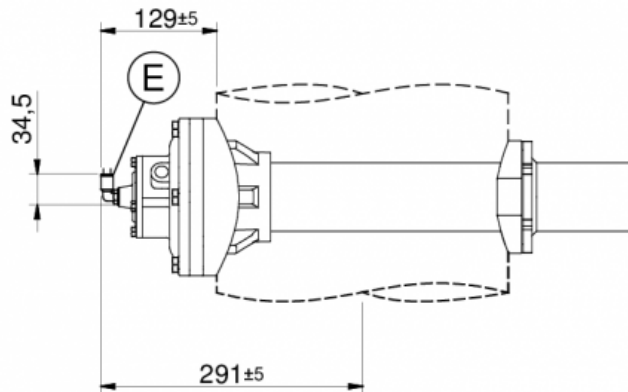

## CONSUMPTION GRAPHS

