

VALVOLE 3"

INTEGRATA A PISTONE SU SERB. 12"

Con gruppo pilota

Valvola ad elevate prestazioni in grado di pulire maniche di più di 10m di lunghezza a basse pressioni

TRIMEC



CERTIFICAZIONI PRODOTTO

STANDARD



OPZIONALI




SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Uscita		Pipe 3"
Pressione di Esercizio		1,5-8 bar
Range Temperatura Standard		-40 °C ; +100 °C
Range Alta Temperatura		-20 °C ; +200 °C
Peso		10 kg
Grado di protezione (standard)		IP65

SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Classi purezza aria consigliati (ISO 8573-1)	Per Solidi	2
	Per Acqua con $T > +3^{\circ}\text{C}$	4
	Per Acqua con $-20^{\circ}\text{C} < T < +3^{\circ}\text{C}$	3
	Per Acqua con $-40^{\circ}\text{C} < T < -20^{\circ}\text{C}$	2
	Per Olio	1

LISTA COMPONENTI

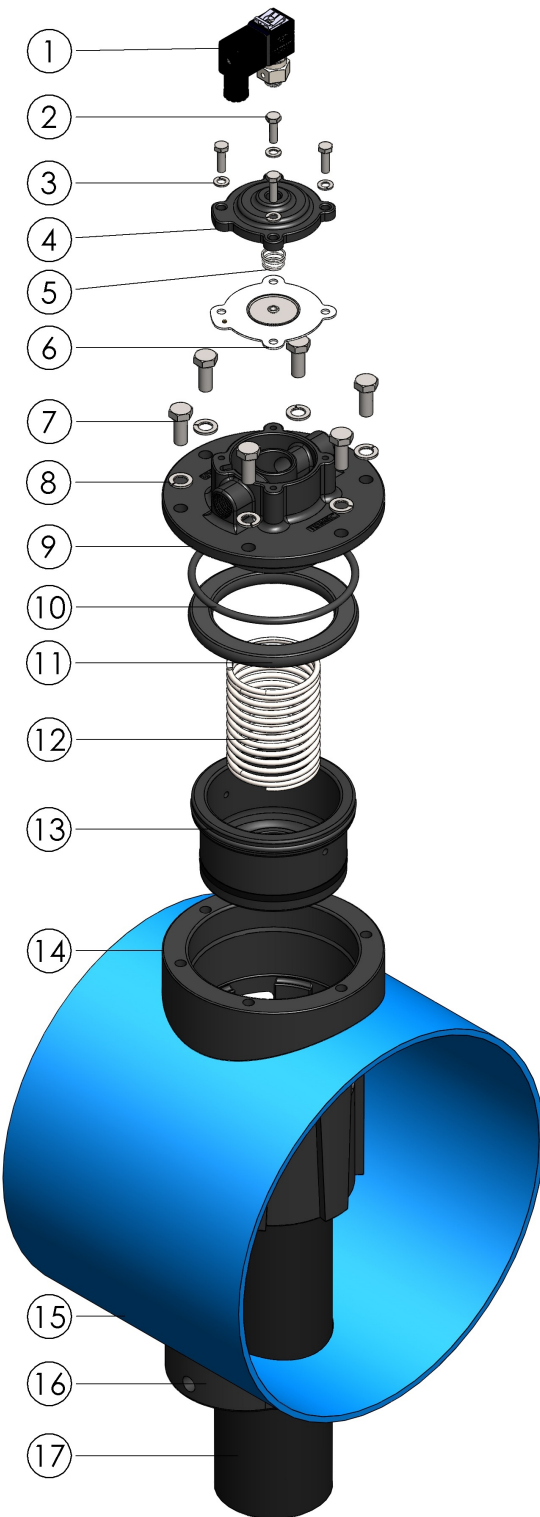No.	Descrizione	Materiale	Immagine
1	Pilot Gruop with Coil		
2	Screw M6	SS	
3	Washer Grover M	SS	
4	Cover 1"	Die Cast Alu	
5	Spring 1"	SS	
6	TPU VITON (Higt T)	Small Diaphgram	
7	Screw M10	SS	
8	Washer Grover M10	SS	
9	SPV Cover	Die Cast Alu	
10	O-Ring	NBR	
11	End Stroke	NBR	
12	SPV Spring	SS	
13	Piston	Die Cast Alu	
14	Body Valve 3"	Die Cast Alu	
15	Tank 12"	CS/SS	
16	Saddle	Die Cast Alu	
17	Blow Pipe 3"	CS/SS	

LAYOUT DIMENSIONALI

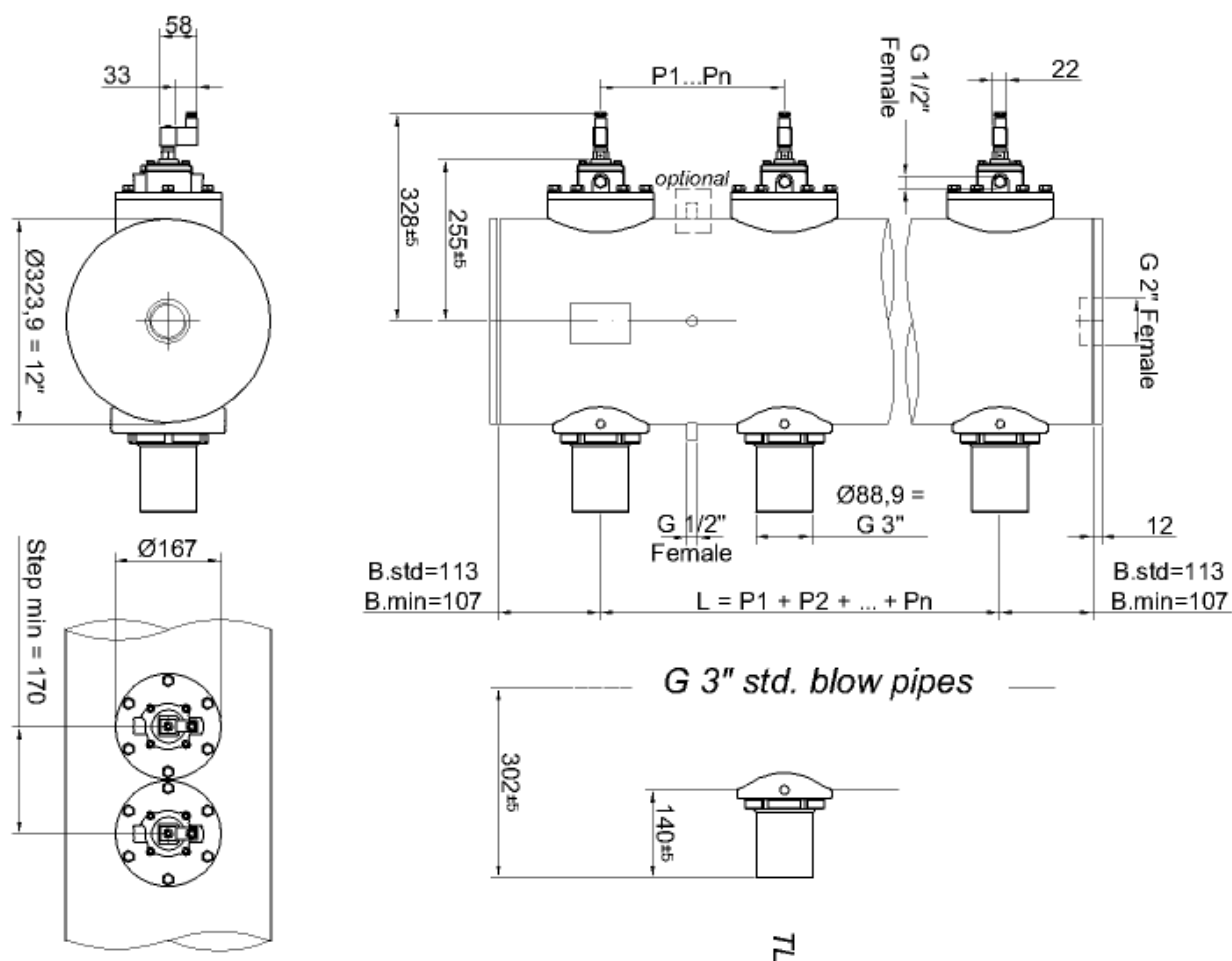


TABELLE CONSUMI

