

VALVOLE 3"



INTEGRATA PER SERBATOIO Ø 12" AE1475I12 Con Gruppo Pilota

Valvole ad alte prestazioni integrate nel serbatoio



CERTIFICAZIONI PRODOTTO

STANDARD




OPZIONALI



SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Uscita		Pipe 3"
Pressione di Esercizio		1,5-8 bar
Range Temperatura Standard		-40 °C ; +100 °C
Range Alta Temperatura		-20 °C ; +200 °C
Peso		11.2 kg
Grado di protezione (standard)		IP65
Classi purezza aria consigliati (ISO 8573-1)	Per Solidi	2
	Per Acqua con T > +3°C	4
	Per Acqua con -20°C < T < +3°C	3
	Per Acqua con -40°C < T < -20°C	2
	Per Olio	1

LISTA COMPONENTI

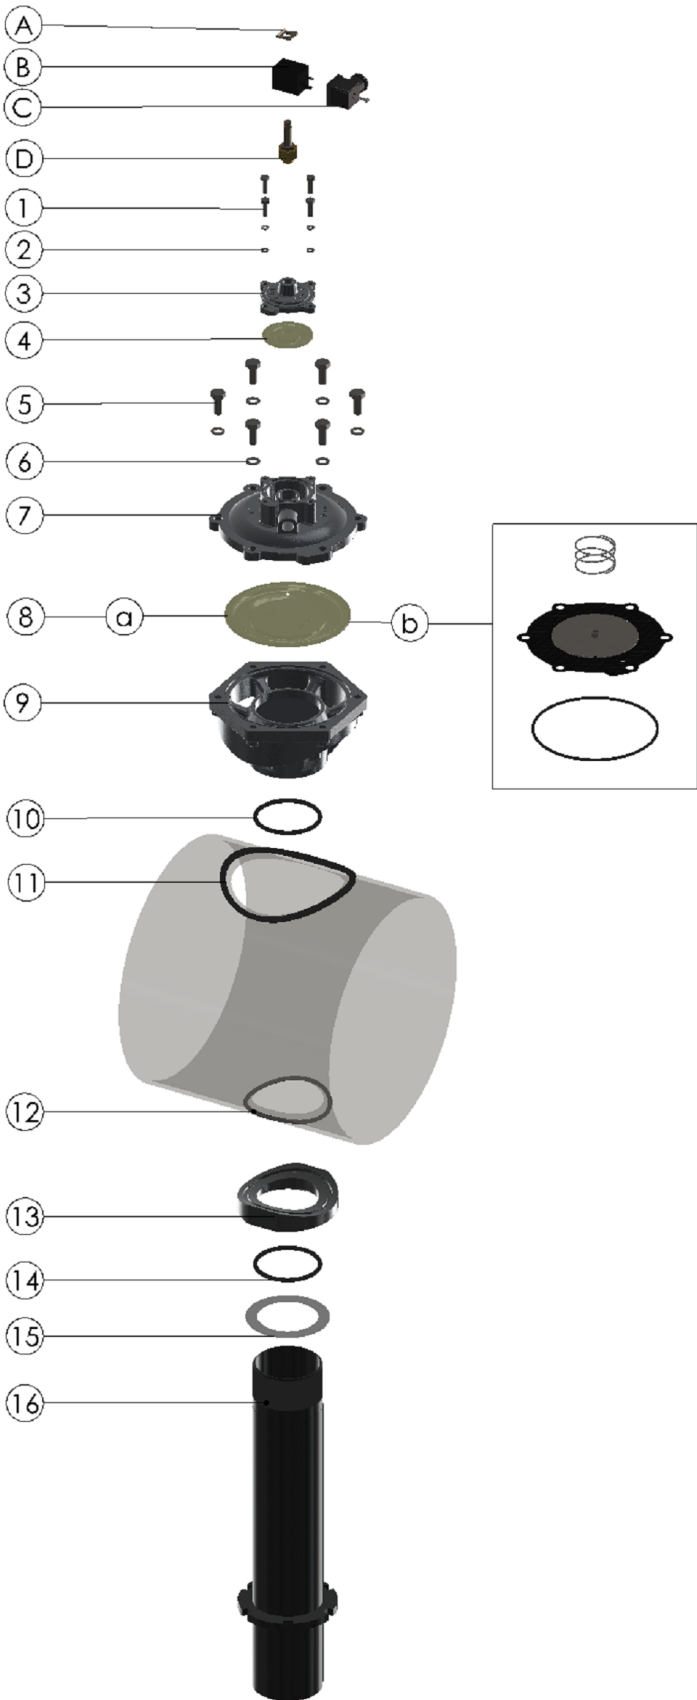No.	Descrizione	Materiale	Immagine
A	Clip	CS Galvanized	
B	Coil	PA	
C	Connector	PA + NBR	
D	Pilot	SS + Brass	
1	Screw M6	SS	
2	Washer	SS	
3	Cover 3/4"	Die Cast Alu	
4	Diaphragm 3/4"	TPE	
5	Screw M10	SS	
6	Washer	SS	
7	Cover 3"	Die Cast Alu	
8a	STD Diaphragm 3"	TPE	
8b	HT Diaphragm 3"	NBR+PTFE	
9	Body 3" Integrated	Die Cast Alu	
10	Body Pipe O'Ringg	NBR	
11	Body Tank O'Ring	NBR	
12	Clamp Tank O'Ring	NBR	
13	Pipe Clamp O'Ring	NBR	
14	Clamp 3"	Die Cast Alu	
15	Washer 3"	Pa + Ela	
16	Blow Pipe 3"	CS or SS	

LAYOUT DIMENSIONALI

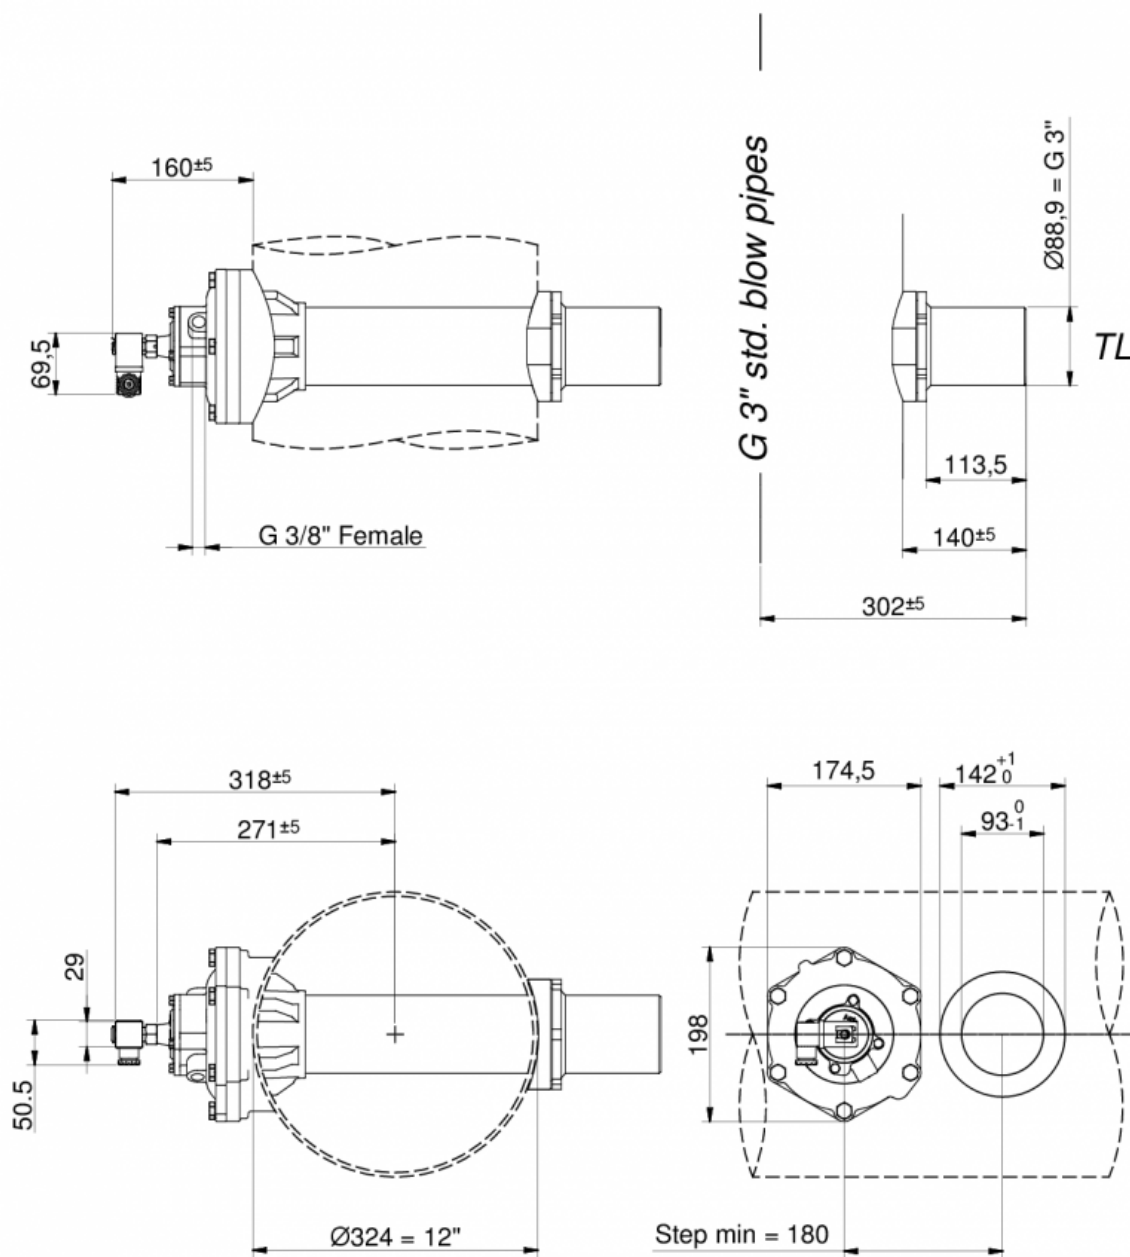


TABELLE CONSUMI

