

1" ½ VALVES



INTEGRATED DOUBLE STAGE FOR Ø 6 " TANK WITH COUPLING CONNECTION AE2440I06PMA With Pneumatic Valve

High performance valves integrated in the tank



PRODUCT CERTIFICATIONS

STANDARD



OPZIONALI



VALVE TECHNICAL FEATURES

Features		Values
Out		Pipe 1"1/2
Working Pressure		1,5-8 bar
Standard Temperature Range		-40 °C ; +100 °C
High Range Temperature		-20 °C ; +200 °C
Kv		62 m ³ /h
Weight		2.25 kg
Protection Level		IP65


VALVE TECHNICAL FEATURES

Features		Values
Air quality classes (ISO 8573-1)	For Solid	2
	For Water with $T > +3^{\circ}\text{C}$	4
	For Water with $-20^{\circ}\text{C} < T < +3^{\circ}\text{C}$	3
	For Water with $-40^{\circ}\text{C} < T < -20^{\circ}\text{C}$	2
	For Oil	1


PARTS LIST

No.	Description	Material
1	Screw M6	SS
2	Washer	SS
3	Cover 1"1/2	Die Cast Alu
8a	STD Diaphragm 1"1/2	TPE
8b	HT Diaphragm 1" 1/2 Kit	NBR+PTFE
9	Body 1" 1/2 Integrated	Die Cast Alu
10	Body Pipe O'Ring	NBR
11	Body Tank O'Ring	NBR
12	Clamp Tank O'Ring	NBR
13	Clamp 1" 1/2	Die Cast Alu
14	Pipe Clamp O'Ring	NBR
15	Washer 1" 1/2	Pa + Ela
16	Blow Pipe 1" 1/2	Die Cast Alu
E	Optional Fitting	Nickeled Brass
17	Tapper Gasket	NBR
18	Washer 1"1/2	CS
19	Nut	Die Cast Alu

Immagine

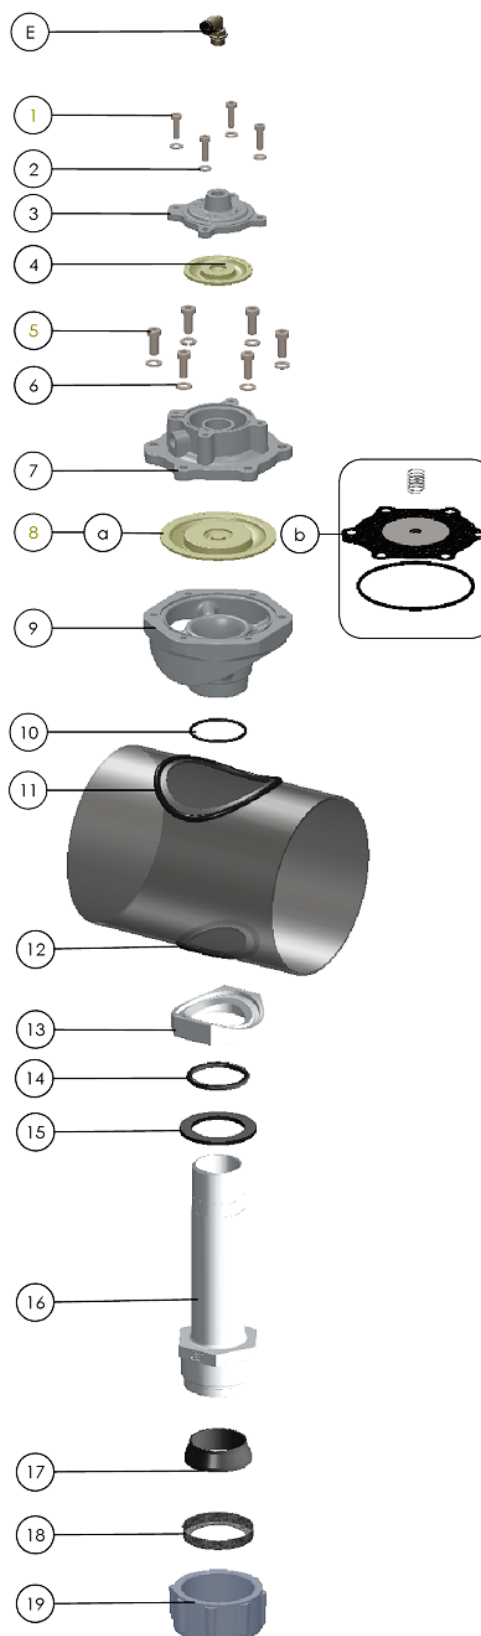

DIMENSIONAL LAYOUT

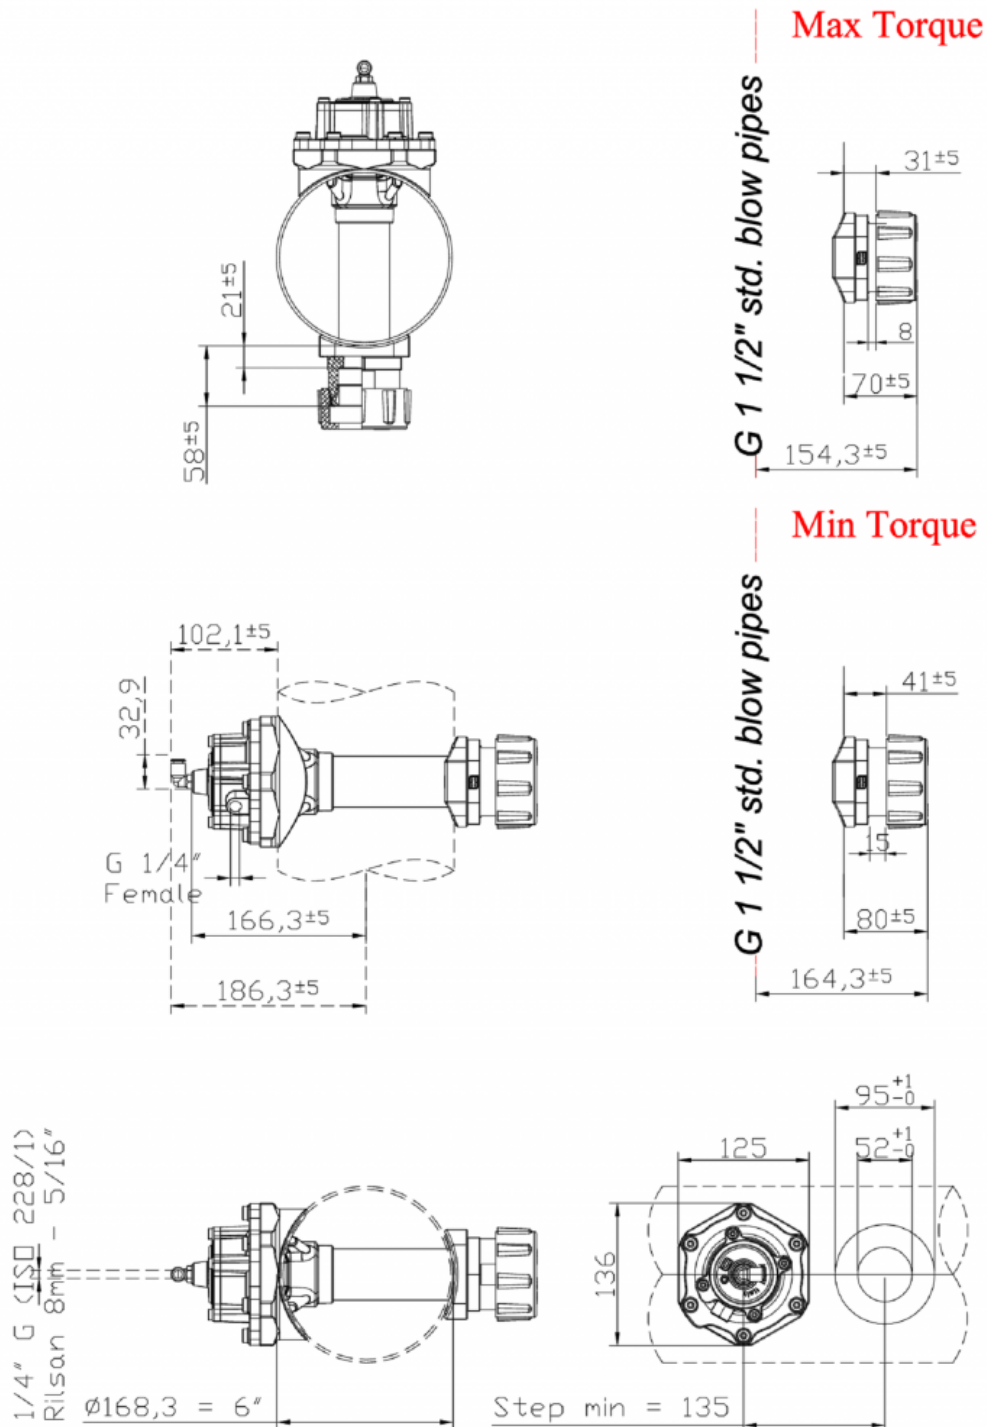

CONSUMPTION GRAPHS

