

VALVOLE 1" 1/2



INTEGRATA DOPPIO STADIO PER SERBATOIO Ø 6" CON CONNESSIONE RAPIDA

*AE1440I06PMA Con Gruppo
Pilota Con Connessione Rapida*

Valvole ad alte prestazioni integrate nel serbatoio



CERTIFICAZIONI PRODOTTO

STANDARD



OPZIONALI



SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Uscita		Pipe 1"1/2
Pressione di Esercizio		1,5-8 bar
Range Temperatura Standard		-40 °C ; +100 °C
Range Alta Temperatura		-20 °C ; +200 °C
Kv		62 m ³ /h

SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Peso		2.3 kg
Grado di protezione (standard)		IP65
Classi purezza aria consigliati (ISO 8573-1)	Per Solidi	2
	Per Acqua con $T > +3^{\circ}\text{C}$	4
	Per Acqua con $-20^{\circ}\text{C} < T < +3^{\circ}\text{C}$	3
	Per Acqua con $-40^{\circ}\text{C} < T < -20^{\circ}\text{C}$	2
	Per Olio	1

LISTA COMPONENTI

No.	Descrizione	Materiale
A	Clip	CS Galvanized
B	Coil	PA
C	Connector	PA + NBR
D	Pilot	SS + Brass
1	Screw M6	SS
2	Washer	SS
3	Cover 3/4"	Die Cast Alu
4	Diaphragm 3/4"	TPE
5	Screw M8	SS
6	Washer	SS
7	Cover 1" 1/2	Die Cast Alu
8a	STD Diaphragm 1" 1/2	TPE
8b	HT Diaphragm 1" 1/2 Kit	NBR+PTFE
9	Body 1" 1/2 Integrated	Die Cast Alu
10	Body Pipe O'Ring	NBR
11	Body Tank O'Ring	NBR
12	Clamp Tank O'Ring	NBR
13	Clamp 1" 1/2	Die Cast Alu
14	Pipe Clamp O'Ring	NBR
15	Washer 1" 1/2	Pa + Ela
16	Blow Pipe 1" 1/2	Die Cast Alu
17	Tapper Gasket	NBR
18	Washer 1"1/2	CS
19	Nut	Die Cast Alu

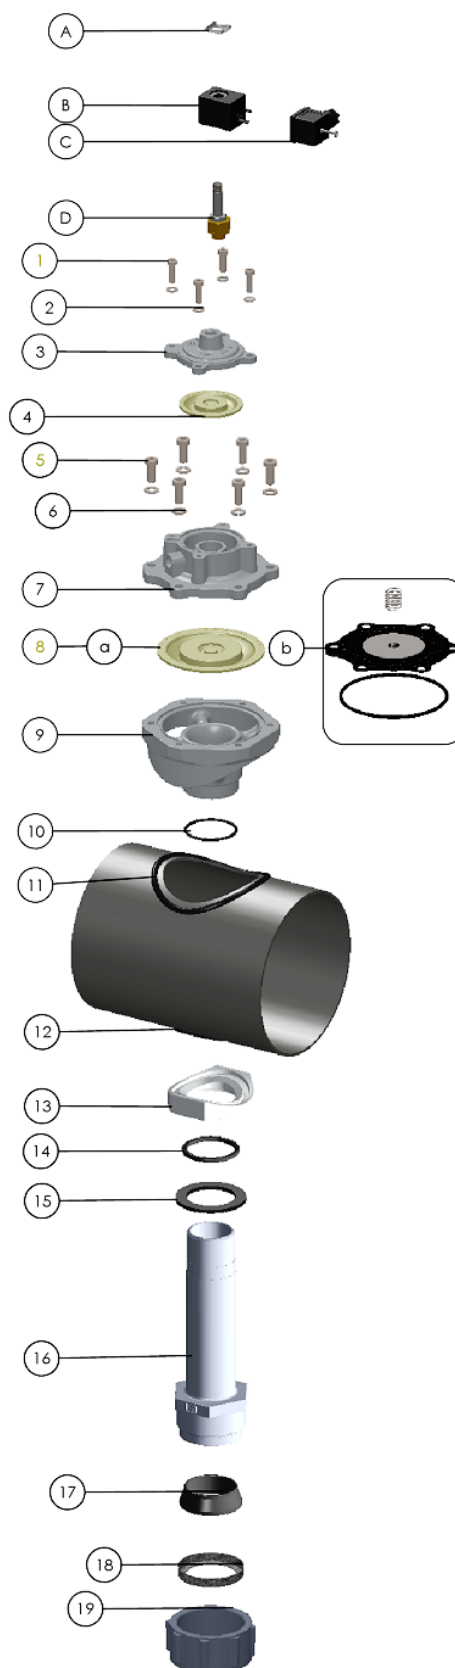
Immagine


TABELLE CONSUMI

