

VALVOLE 3" ½

INTEGRATA PER SERBATOIO Ø 14" Con valvola pneumatica *Nuovo concetto di pulizia*

TRIMEC

Prestazioni di pulizia rivoluzionarie unite a consumi d'aria ridotti, pressione di lavoro da 1 a 4 bar, passo minimo 170mm per valvole da 3", sonic valve cleaning effect.

40% in più di superficie filtrante per cartucce > 10m.

CERTIFICAZIONI PRODOTTO

STANDARD



OPZIONALI




SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Uscita		Pipe 3"1/2
Pressione di Esercizio		1,5-8 bar
Range Temperatura Standard		-40 °C ; +100 °C
Range Alta Temperatura		-20 °C ; +200 °C
Peso		10 kg
Grado di protezione (standard)		IP65

SPECIFICHE TECNICHE VALVOLA

Caratteristiche		Valori
Classi purezza aria consigliati (ISO 8573-1)	Per Solidi	2
	Per Acqua con $T > +3^{\circ}\text{C}$	4
	Per Acqua con $-20^{\circ}\text{C} < T < +3^{\circ}\text{C}$	3
	Per Acqua con $-40^{\circ}\text{C} < T < -20^{\circ}\text{C}$	2
	Per Olio	1

LISTA COMPONENTI

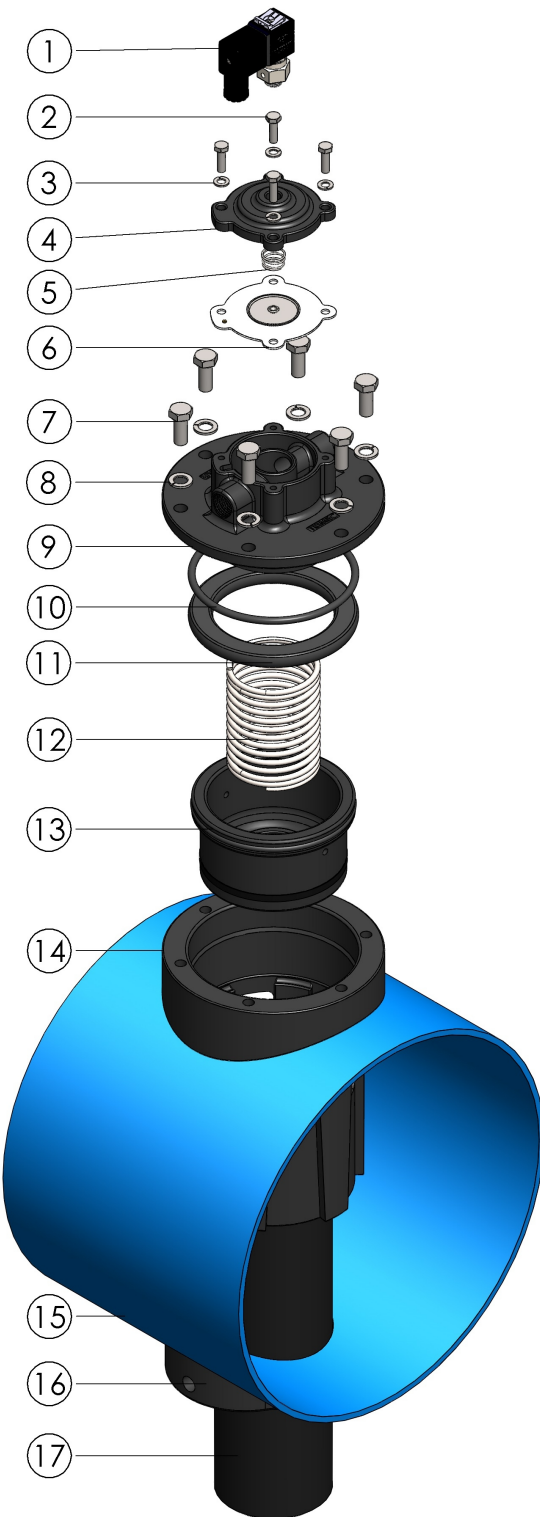No.	Descrizione	Materiale	Immagine
D	Pilot Group with Coil		
1	Screw M6	SS	
2	Washer Grover M6	SS	
3	Cover 1"	Die Cast Alu	
4b	Spring 1"	SS	
5	TPU VITON (Higt T)	Small Diaphgram	
6	Screw M10	SS	
7	Washer Grover M10	SS	
9	SPV Cover	Die Cast Alu	
10	O-Ring	NBR	
11	End Stroke	NBR	
12	SPV Spring		
13	Piston	Die Cast Alu	
14	Body Valve 3"1/2	Die Cast Alu	
15	Tank 14"	CS/SS	
16	Saddle	Die Cast Alu	
17	Blow Pipe 3"1/2	CS/SS	

LAYOUT DIMENSIONALI




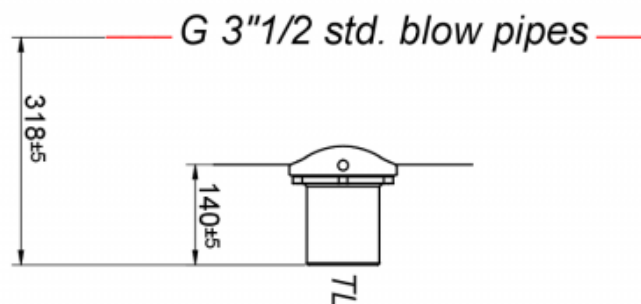


TABELLE CONSUMI

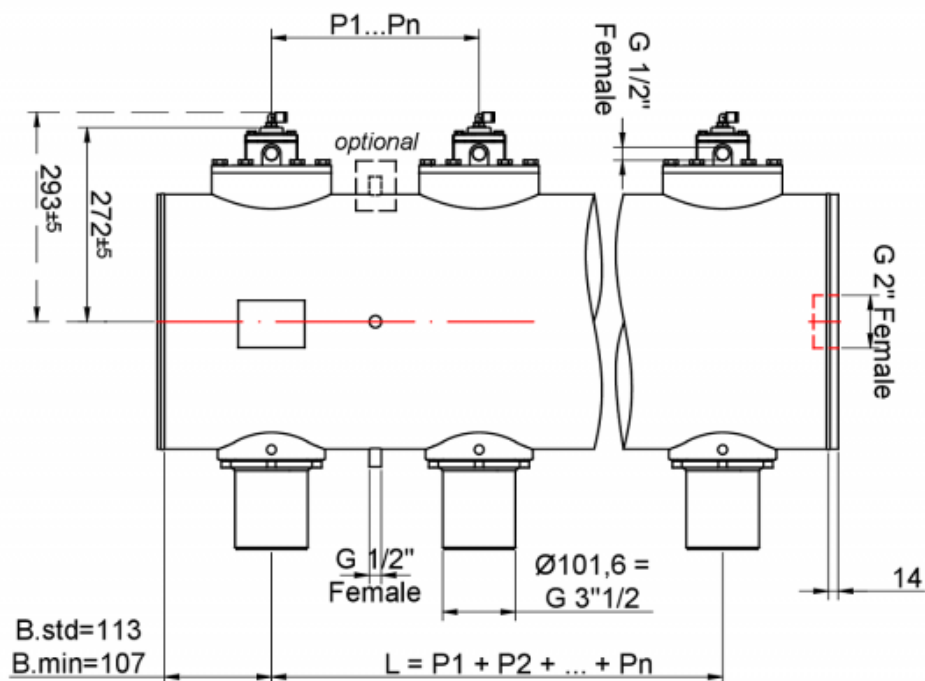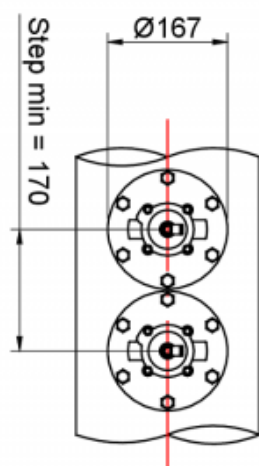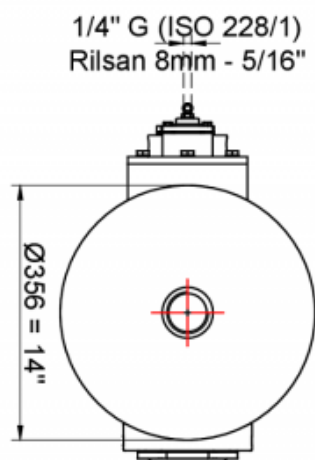