


ENGINE PROTECTION

CM-S01

Electric cabinet for start-up of mechanical engines of all powers and brands.

It is equipped with 3 relays for the control of glow plugs, fuel valve and starter engine and 5 fuses with led bright signal to indicate when fuse is interrupted. The electric cabinet, using the signal of the alternator, is able to remove the ignition relay automatically, avoiding the damage of the starter engine.

☑The timer for glow plugs ignition is already present in the system.

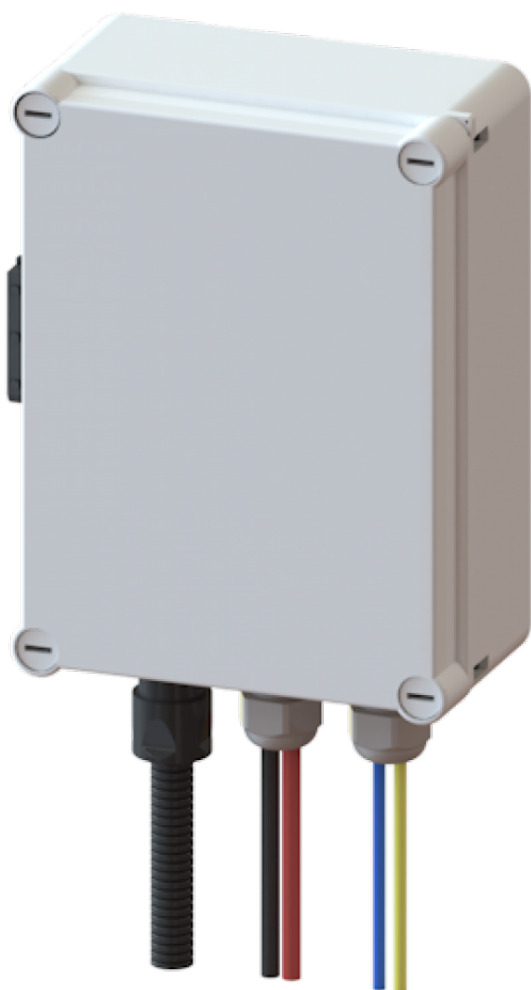

PRODUCT CERTIFICATIONS

STANDARD



TECNICAL SPECIFICATION

Features	Type	Description
Dimensions	External Dimensions (L x H x W mm)	230x160x79
Protection	Protection Level (standard)	IP65
Temperature	Working Temperature (°C)	-20...+70
	Storage Temperature (°C)	-30...+80
Power Supply	Power Supply Range (standard)	8 - 30 Vdc
Inputs	Analog Input (nr)	2

TECNICAL SPECIFICATION

Features	Type	Description
Outputs	Relay Outputs (nr)	3
Functions	Hour Counter	ok

DIMENSIONAL LAY-OUT

